


SR-FF



特性表

S	R	Q^+
0	0	Q
0	1	0
1	0	1
1	1	-


特性展開表

S	R	Q	Q^+
0	0	0	0
		1	1
0	1	0	0
		1	0
1	0	0	1
		1	1
1	1	0	-
		1	-

入力要求表

Q	Q^+	S	R
0	0	0	-
0	1	1	0
1	0	0	1
1	1	-	0

D-FF




D	Q^+
0	0
1	1

D	Q	Q^+
0	0	0
	1	0
1	0	1
	1	1

Q	Q^+	D
0	0	0
0	1	1
1	0	0
1	1	1

T-FF




T	Q^+
0	Q
1	$\overline{Q}$

T	Q	Q^+
0	0	0
	1	1
1	0	1
	1	0

Q	Q^+	T
0	0	0
0	1	1
1	0	1
1	1	0

JK-FF




J	K	Q^+
0	0	Q
0	1	0
1	0	1
1	1	$\overline{Q}$


J	K	Q	Q^+
0	0	0	0
		1	1
0	1	0	0
		1	0
1	0	0	1
		1	1
1	1	0	1
		1	0

Q	Q^+	J	K
0	0	0	-
0	1	1	-
1	0	-	1
1	1	-	0


SRFF

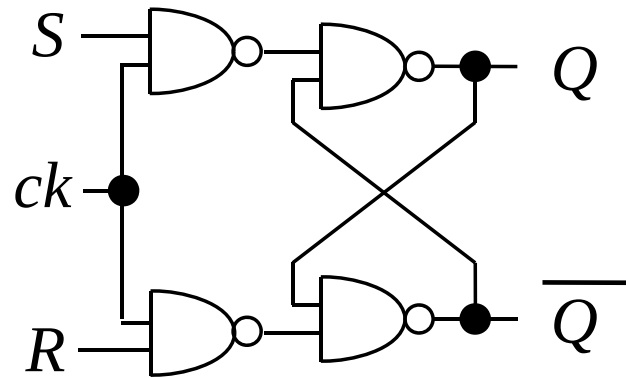

DFF

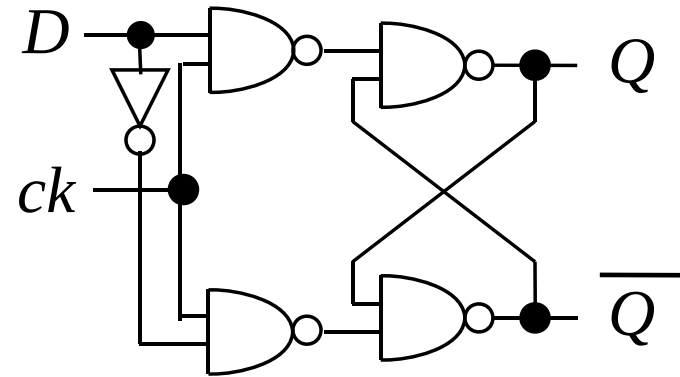

TFF

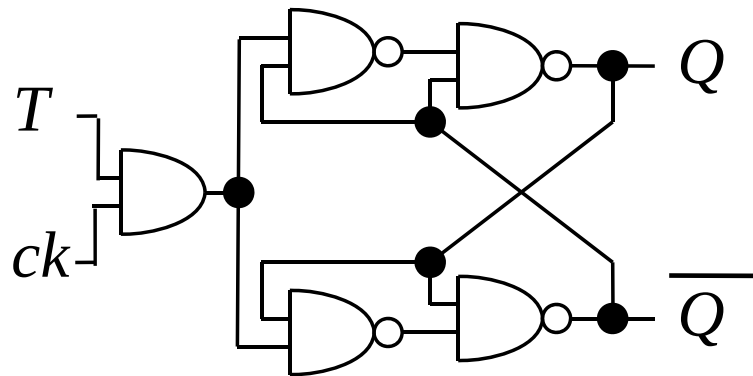

JKFF

